

**Convenient and easy to use installation projector with advanced technology and 5,500 ANSI lumens brightness in a low profile design.**



## Key Features

- WXGA 1280 x 800 resolution
- 5,500 ANSI lumens white/color output
- 16 watt audio output
- 3,000:1 contrast ratio
- HDMI 2 inputs
- 3,000 hours lamp life (Eco mode)\*
- 20,000 hours hybrid filter\*\*
- Picture by Picture

Dukane's installation-friendly 8973WA LCD projector is designed to provide maximum presentation impact in mid to large venue applications. It offers a versatile array of innovative, performance-enhancing features along with advanced video display technology providing bold, brilliant colors with incredible image clarity and uniformity. Plus, with motorized zoom, focus and superior lens shift, and a variety of lens options, the 8973WA is at the top of its class when it comes to installation flexibility. All this, and with a lower cost of ownership. For added peace of mind, Dukane's 8973WA is also backed by a generous warranty and our world-class service and support programs.

# 8973WA


## DUKANE CORP

Audio Visual Products  
2900 Dukane Drive, St. Charles, Illinois 60174  
Toll-free: 888-245-1966 • Fax: 630-584-5156  
E-mail: [avsales@dukane.com](mailto:avsales@dukane.com)  
[www.dukane.com/av](http://www.dukane.com/av)



## UNIQUE FEATURES

### Center Lens Design



This feature makes it easy to align the projector with the center of the screen for faster and trouble-free setup.

### DICOM® Simulation Mode



Images in DICOM (Digital Imaging and Communications in Medicine) Mode are reproduced with an advanced grayscale level. This mode is ideal for viewing grayscale medical images such as X-rays, and for training and educational purposes.

These projectors are not approved medical devices. They should not be used for actual medical diagnosis.

### Motorized Zoom, Focus and Lens Shift Control



Allows for greater range of installation possibilities. With the motorized function you can make fine adjustments through the remote control or RS232/IP device.

### Multiple Lens Options



In addition to the one ML703 middle throw standard lens, four optional lenses are available: FL701 fixed; SL702 short throw; LL704 long throw; and UL705 ultra-long throw.

### Perfect Fit 2



Enables the user to adjust individual corners and sides independent of one another. Perfect Fit 2 provides vertical and horizontal digital correction of either barrel or pin cushion distortions. This feature helps correct geometric and complicated distortions. Perfect Fit 2 allows the projected image to fit correctly to the screen quickly and easily.

### Picture By Picture



Enables the content from two input sources to be displayed simultaneously, side by side on one screen. You can use any two sources including 2 HDMI, with both images sharing equal screen size. The feature is ideal for teleconferencing applications.

### 360° Rotation



Display rotation of 360° for creative applications and greater installation flexibility.

### Status Monitor



With Hitachi's status monitor, you'll have access in real time to projector diagnostics. Status updates include configuration information, maintenance history, as well as error and alarm messaging. For even greater user convenience, the status monitor can be accessed on the rear input panel or through the Hitachi network tools software.

## STANDARD FEATURES

### MyButton



Four customizable buttons on the remote control allow users to create a shortcut for projector functions such as Information, Auto Keystone, Picture Mode etc.

### Network Control, Maintenance and Security



Embedded networking gives you the ability to manage and control multiple projectors over your LAN. Features include scheduling of events, centralized reporting, image transfer and e-mail alerts for reactive and routine maintenance.

### PC-Less Presentation



By using a USB memory stick or other storage device, you can use the projector without a computer. Menus are easy to see with a thumbnail display. Additionally there is also a slideshow function.

### PJMessenger



PJMessenger function allows you to send and display text messages and audio alerts on your networked projectors. It is an easy and efficient way to send announcements out to multiple units.

### Present Content via LAN



Hitachi's suite of networking software allows you to easily send content directly from your PC to the projector via your LAN connection.

### Wireless Presentation Ready



You can use a wireless network by connecting the projector to a computer using the optional USB wireless adapter part number USBWL11N. The adapter supports IEEE802.11b/g and the latest 11n.

## DUKANE CORP

Audio Visual Products  
2900 Dukane Drive, St. Charles, Illinois 60174  
Toll-free: 888-245-1966 • Fax: 630-584-5156  
E-mail: avsales@dukane.com  
www.dukane.com/av

\* Actual lamp life will vary by individual lamp and based on environmental conditions, selected operating mode, user settings and usage. Hours of average lamp life specified are not guaranteed and do not constitute part of the product or lamp warranty. Lamp brightness decreases over time.

\*\* Actual filter life will vary by individual filter and based on environmental conditions, selected operating mode, user settings and usage. Hours of average filter life specified are not guaranteed and do not constitute part of the product warranty.

# 8973WA LCD Projector



## Quality, reliability and installation convenience.

From mid-size to very large auditoriums and conference halls, Dukane's 8973WA LCD projector is the perfect solution. With 5,500 ANSI lumens brightness and WXGA 1280 x 800 resolution, the 8973WA will deliver dynamic images guaranteed to dazzle any audience. Incorporating Dukane's leading-edge technology, the 8973WA features high contrast ratio, long lamp life, a variety of lens options to accommodate your specific application, and is wireless presentation ready. Plus, embedded



networking gives you the ability to manage and control multiple projectors over your LAN (scheduling of events, centralized reporting, image transfer, and e-mail alerts). Even with the array of advanced features, Dukane's 8973WA is designed for user-friendly operation and installation convenience.



Front 3/4 View



Top View




Side Profile



Rear View

## Input/Outputs

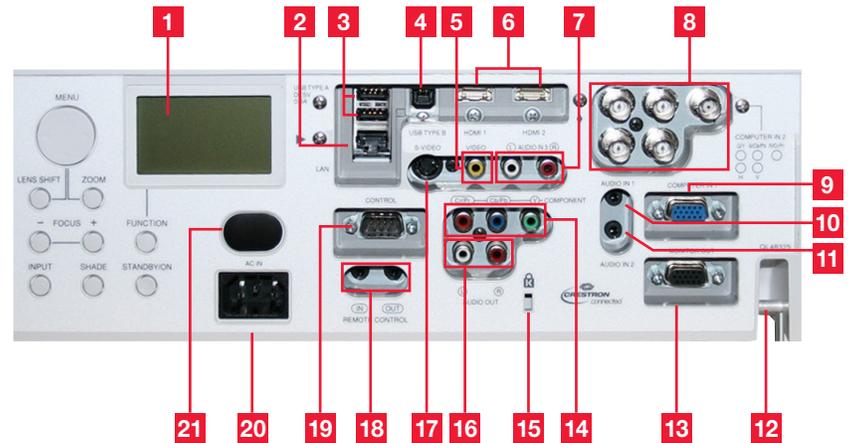

- |                    |                  |                       |
|--------------------|------------------|-----------------------|
| 1. Status Monitor  | 8. Computer in 2 | 15. Kensington Lock   |
| 2. LAN             | 9. Computer in 1 | 16. Audio Out         |
| 3. USB Type A x 2  | 10. Audio in 1   | 17. S-Video           |
| 4. USB Type B      | 11. Audio in 2   | 18. Remote Control    |
| 5. Composite Video | 12. Security Bar | 19. Control (RS-323C) |
| 6. HDMI x 2        | 13. Monitor Out  | 20. AC Inlet          |
| 7. Audio in 3      | 14. Component    | 21. Remote Sensor     |

### DUKANE CORP

Audio Visual Products  
 2900 Dukane Drive, St. Charles, Illinois 60174  
 Toll-free: 888-245-1966 • Fax: 630-584-5156  
 E-mail: avsales@dukane.com  
 www.dukane.com/av

# 8973WA

## Accessories and Lenses

<b>Supplied Accessories</b>	Remote control, power cord, computer cable, one standard ML703 lens, lens cover, user's manual, security label, application CD, adapter cover
<b>Optional Accessories</b>	TB-1 wireless USB tablet, USBWL11N USB wireless adapter
<b>Optional Lenses</b>	4 optional lenses are available: FL701, SL702, LL704, UL705
<b>Replacement Parts</b>	
<b>Lamp</b>	456-8971
<b>Remote Control</b>	HL02801
<b>Filter</b>	UX38241

## Projection Throw Chart

Screen Size 16:10		Throw Distance	
Diagonal	Width	Min	Max
30	25	39	78
60	51	78	154
80	68	104	206
100	85	129	257
150	127	194	385
200	170	259	513
250	212	323	641
300	254	388	769

Throw Ratio: 1.5 - 3.0 : 1 (distance : width)  
Screen size and throw distance are measured in inches with standard lens ML703.

## Projection Lens Chart

Lens	Inches	Meters
<b>ML703</b>	129 - 257	3.3 - 6.5
<b>FL701</b>	71	1.8
<b>SL702</b>	102 - 154	2.6 - 3.9
<b>LL704</b>	244 - 415	6.2 - 10.5
<b>UL705</b>	415 - 705	10.5 - 17.9

Projection distances measured in inches and meters with standard lens and optional lenses when projecting onto a 100" diagonal screen.



## DUKANE CORP

Audio Visual Products  
2900 Dukane Drive, St. Charles, Illinois 60174  
Toll-free: 888-245-1966 • Fax: 630-584-5156  
E-mail: avsales@dukane.com  
www.dukane.com/av

## Specifications

<b>Display</b>	<b>Projection Technology</b>	3LCD, 3 chip technology
	<b>Resolution</b>	WXGA 1280 x 800
	<b>White Light Output</b>	5,500 ANSI lumens
	<b>Color Light Output</b>	5,500 ANSI lumens
	<b>Colors</b>	16.7 million colors
<b>Lens &amp; Operation</b>	<b>Aspect Ratio</b>	Native 16:10 and 4:3 / 16:9 compatible
	<b>Contrast Ratio</b>	3,000 : 1 (using active IRIS)
	<b>Throw Ratio (distance : width)</b>	1.5 - 3.0:1 (with standard lens)
	<b>Lens</b>	f = 24 - 48 mm (with standard lens) x 2.0 motorized zoom, focus & lens shift
	<b>Lamp Wattage</b>	330W
	<b>Expected Lamp Life*</b>	Approximately 2,500 hours (standard mode) 3,000 hours (Eco mode)
	<b>Expected Filter Life**</b>	Approximately 20,000 hours
	<b>Speaker Output</b>	16W (8W x 2)
	<b>Acoustic Noise Level</b>	37 dB (31 dB in Eco mode)
	<b>Keystone</b>	+/- 35° with standard lens
<b>Compatibility</b>	<b>Computer</b>	VGA, SVGA, XGA, WXGA, WXGA+/SXGA/WSXGA+/UXGA (compressed), MAC 16"
	<b>H-Sync</b>	31.5 kHz - 106 kHz
	<b>V-Sync</b>	56 Hz - 120 Hz
	<b>Composite Video</b>	NTSC, NTSC4.43, PAL, PAL-M, -N, SECAM
	<b>Component Video</b>	480i, 480p, 576i, 720p, 1080i, 1080p
<b>Connectors</b>	<b>HDMI</b>	480i, 480p, 576i, 720p, 1080i, 1080p, Computer signal TMDS Clock 27 MHz - 150 MHz
	<b>Digital Input</b>	HDMI x 2 (HDCP compliant)
	<b>Computer Input 1</b>	15-pin mini D-sub x 1
	<b>Computer Input 2</b>	BNC x 5
	<b>Computer Monitor Output</b>	15-pin mini D-sub x 1
	<b>Video Input</b>	
	S-Video	Mini DIN 4-pin x 1
	Composite Video	RCA jack x 1
	Component Video	RCA jack x 3, 15-pin mini D-sub x 1 (shared with computer In 1) BNC x 3 (shared with computer In 2)
	<b>Audio Input</b>	3.5 mm stereo mini jack x 2, RCA jack (L/R) x 1
	<b>Audio Output</b>	RCA jack (L/R) x 1
	<b>Network LAN Wired</b>	RJ-45 port (10 base-T / 100 base-TX)
	<b>Network LAN Wireless</b>	USB-A, IEEE802.11 b/g/n - optional wireless adapter required
	<b>USB</b>	Type A x 2 (PC-less presentation, wireless adapter) Type B x 1 (USB display or mouse control)
	<b>Control Terminals</b>	9-pin D-sub x 1 (RS-232 control)
<b>Ratings &amp; Warranty</b>	<b>Power Supply</b>	AC100-120V / AC220-240V, 50/60Hz
	<b>Power Consumption</b>	480W
	<b>Operating Temperature</b>	32°F - 113°F (0°C - 45°C)
	<b>Dimensions (W x D x H)</b>	19.6" x 15.6" x 5.3" (without lens) / Shipping 19.6" x 15.6" x 5.3"
	<b>Weight</b>	approx. 19.39 lbs. / Shipping 19.39 lbs.
	<b>Approvals</b>	UL 60950-1 / cUL FCC Part 15 subpart B class A
	<b>Warranty</b>	Five (5) year limited warranty plus Dukane's 1 year Peace of Mind Loaner Program
<b>UPC</b>	60519400285	

\* Actual lamp life will vary by individual lamp and based on environmental conditions, selected operating mode, user settings and usage. Hours of average lamp life specified are not guaranteed and do not constitute part of the product or lamp warranty. Lamp brightness decreases over time.

\*\* Actual filter life will vary by individual filter and based on environmental conditions, selected operating mode, user settings and usage. Hours of average filter life specified are not guaranteed and do not constitute part of the product warranty.



# 8973WA