

65" Interactive Touch Panel



Multi-touch and gesture recognition make interactivity simple and intuitive. Included software allows for annotation, saving and sharing information.

The Dukane ITP65A interactive display with full 1920 x 1080 HD resolution is a high impact tool that encourages interaction and collaboration in the classroom. The multi-point touchscreen is simple and intuitive and works with any 3rd party software application. Included software allows for annotation, saving and sharing of information. The low-glare surface and brilliant colors create a truly impressive display that will change the way you view interactivity.

Features

- 65" diagonal touch interactive LCD display
- High definition (1920 x 1080) HD resolution
- Low-glare surface for crisp, clear images in any light
- Multi-touch capability and gesture recognition
- Included software to display, annotate, store and share
- Compatible with all 3rd party software apps
- Two built-in 15W speakers

DUKANE CORPORATION

Audio Visual Products

2900 Dukane Drive, St. Charles, Illinois 60174

Toll-free: 888-245-1966 • Fax: 630-584-5156


E-mail: avsales@dukane.com

www.dukaneav.com

Specifications

Model	ITP65A
Screen	TFT LED LCD
Size	65" Diagonal
Max. Resolution	1920 x 1080
Aspect Ratio	16:9
Refresh Frequency	100Hz/120Hz
Max. Colors	1.06 Billion Colors
Pixel Pitch	0.4845mm x 0.4845mm
Max. Brightness	450 cd/m ²
Contrast Ratio	4000:1
Viewing Angle	178°/178°
Active Display Area	56.2" x 31.6"
Installation	Landscape, VESA 400x400, M8
Touch Surface	Low-glare, tempered glass
Input Terminals	HDMI x 2
	VGA x 1
	Audio (3.5mm) x 1
	Audio YPBPR (3.5mm) x 1
	Composite Video (RCA) x 1
	Audio (RCA) x 2
	TV (75 ohm IEC) x 1
Android OS Terminals	USB x 3
	SD Card Slot
	RJ-45
Output Terminals	Composite Video (RCA) x 1
	Audio (3.5mm) x 2
Speaker Output	15W x 2
Touch Technology	Optical Infrared
Touch Response Time	< 8 ms
Touch Resolution	4096 x 4096
Minimum Discernible	5mm
Touch Interface	USB type B
Touch Compatibility	10 pt Windows 7/8/10, 1 pt Mac
Software Compatibility	Windows 7/8/10, Mac OS X or later
Power Requirement	AC 100-240V, 50/60 Hz
Power Consumption Max.	480W
Power Consumption Standby	< 0.5W
Operating Temperature	14°F - 122° F
Operating Humidity	10% - 85% (no condensation)
MTBF	50,000 hours
Warranty	1 Year Limited Parts

65" Interactive Touch Panel

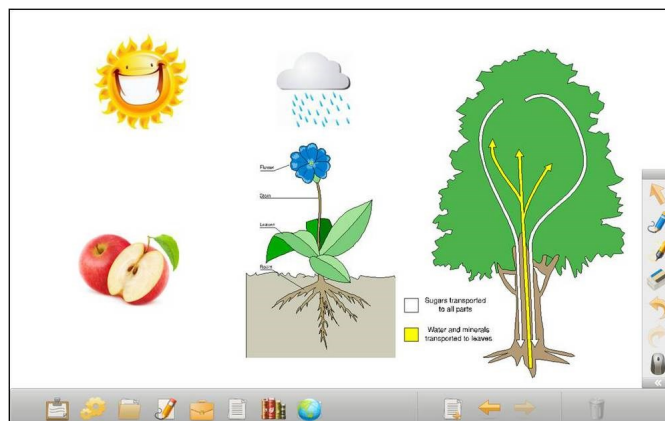

Software is designed for simple, intuitive annotation, save your work and export to share with others.

SF670



ITPSTAND



Accessories Included	Power Cord (10'), HDMI Cable (4'), USB (A-B) Cables (16' & 4'), VGA Cable (16'), 3.5mm Audio Cable (16'), Remote Control, Software CDROM, Pointer x 1, Stylus x 2
Optional Accessories	Wall Mount (SF670), (ITP65WM) Mobile Floor Stand (ITPSTAND)

Weights & Dimensions

Dimensions	60.1" x 35.5" x 3.6"
Weight	150 lbs.
Package Dimensions (carton)	68" x 12" x 43"
Package Weight (carton)	175 lbs.