

84" Interactive Touch Panel



Multi-touch and gesture recognition make interactivity simple and intuitive. Included software allows for annotation, saving and sharing information.

The stunning Dukane ITP84 LCD interactive display with 4K UHD 3840 x 2160 resolution is a high impact tool for corporate, government and educational institutions looking for collaboration, training, wayfinding or a variety of other interactive applications. Multi-touch capability and gesture recognition make using the Dukane ITP84 simple and intuitive. Included software allows for annotation, saving and sharing of information. A truly impressive display the Dukane ITP84 will change the way you view interactivity.

Features

- 84" Diagonal Touch Interactive LCD Display
- Stunning 4K UHD (3840 x 2160) Resolution
- Anti-glare surface for crisp, clear images in any light
- Multi-touch Capability and Gesture Recognition
- Included Software to Display, Annotate, Store and Share
- Compatible with all 3rd party software apps
- Two Built-in 15W Speakers


DUKANE CORPORATION

Audio Visual Products
2900 Dukane Drive, St. Charles, Illinois 60174
Toll-free: 888-245-1966 • Fax: 630-584-5156
E-mail: avsales@dukane.com
www.dukaneav.com

Specifications

Model	ITP84
Screen	TFT LED LCD
Size	84" Diagonal
Max. Resolution	3840 x 2160
Aspect Ratio	16:9
Refresh Frequency	100Hz/120Hz
Max. Colors	1.06 Billion Colors
Pixel Pitch	0.4845mm x 0.4845mm
Max. Brightness	450 cd/m ²
Contrast Ratio	4000:1
Viewing Angle	178°/178°
Active Display Area	73.2" x 41.2"
Installation	Landscape Orientation
Touch Surface	Anti-glare, tempered glass
Input Terminals	HDMI x 2
	VGA x 1
	Audio (3.5mm) x 1
	Component YBCBR (RCA) x 1
	S-Video x 1
	Composite Video (RCA) x 2
	Audio (RCA) x 2
	SPDIF (RCA) x 1
	TV (75 ohm IEC) x 1
	USB x 1
Output Terminals	Composite Video (RCA) x 1
	Audio (RCA) x 1
	Audio (3.5mm) x 1
Speaker Output	15W x 2
Touch Technology	Infrared
Response Time	< 8ms
Touch Resolution	4096 x 4096
Minimum Discernible	5mm
Touch Interface	USB
Touch Compatibility	Windows 7/8/10: 6-pt Mac: not compatible
Software Compatibility	Windows 7/8/10
Power Requirement	AC 100-240V, 50/60 Hz
Power Consumption Max.	480W
Power Consumption Standby	< 0.5W
Operating Temperature	14°F - 122° F
Operating Humidity	10% - 85% (no condensation)
MTBF	50,000 hours
Warranty	1 Year Limited Parts

84" Interactive Touch Panel

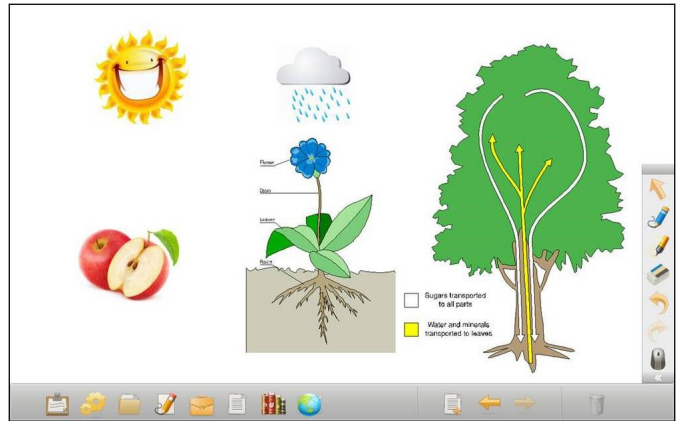

Software is designed for simple, intuitive annotation, save your work and export to share with others.



Accessories Included	Power Cord
	Remote Control
	USB Cable
	Stylus x 2, Pointer x 1
Optional Accessories	Wall Mount (SF680)
	Mobile Floor Stand (SR598)

Weights & Dimensions

Dimensions	77" x 4" x 47"
Weight	226 lbs.
Package Dimensions (carton)	87" x 10" x 53"
Package Weight (carton)	265 lbs.
Shipping Dimensions (crate)	88" x 14" x 58"
Shipping Weight (crate)	420 lbs.