

Setting up the MS-1000


The MS-1000 requires that you download software in order to set the IP Address, Subnet Mask and Default gateway. The software is "Device Discovery" and can be downloaded from here:

http://ftp1.digi.com/support/utilities/40002265_g.exe

STEP 1—Download and run the install program from your download directory

STEP 2—Before running the Device Discovery software connect the MS-1000 to the network with a standard CAT 5 cable.


STEP 3—Start the program and you should see the following screen:

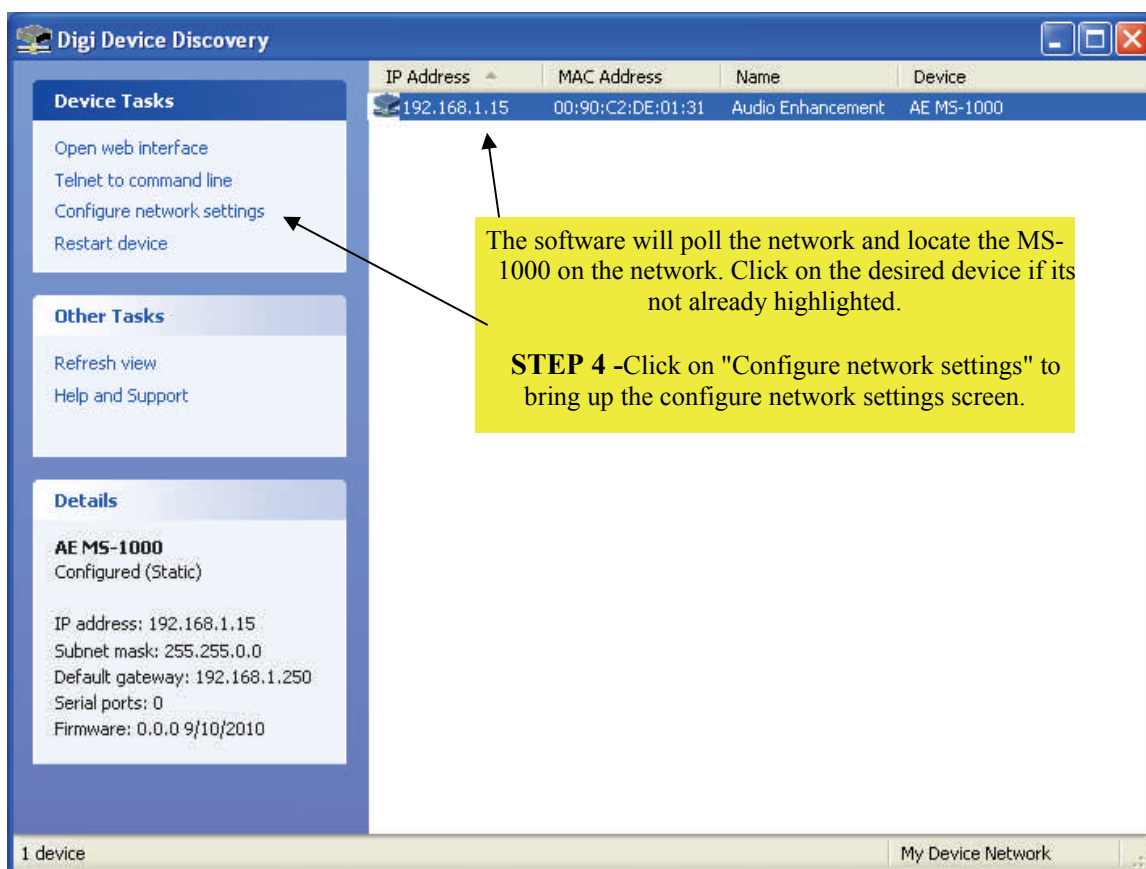

THE SAFE SYSTEM™

Security Alert For Education

STEP 5—Click on "manually configure network settings"

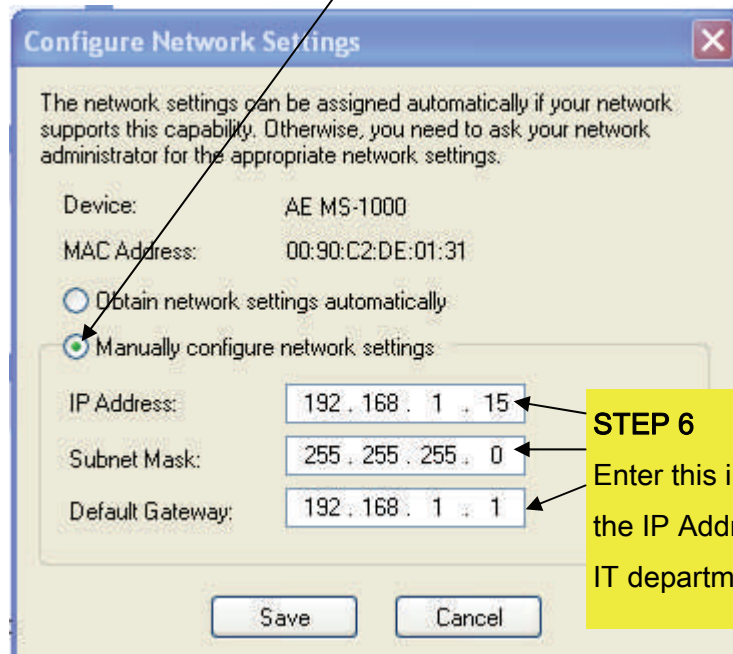

The network settings can be assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate network settings.

Device: AE MS-1000
MAC Address: 00:90:C2:DE:01:31

☐ Obtain network settings automatically
☒ Manually configure network settings


IP Address: 192 . 168 . 1 . 15
Subnet Mask: 255 . 255 . 255 . 0
Default Gateway: 192 . 168 . 1 . 1

Save Cancel

STEP 6

Enter this information based on the IP Address you obtain from your IT department

Default password is "audioe"

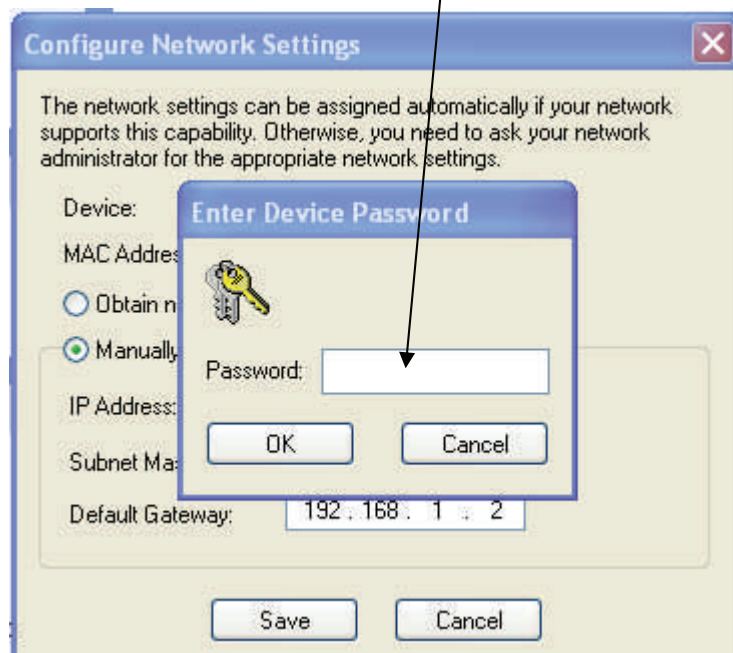

The network settings can be assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate network settings.

Device: AE MS-1000
MAC Address: 00:90:C2:DE:01:31

☐ Obtain network settings automatically
☒ Manually configure network settings

IP Address: 192 . 168 . 1 . 15
Subnet Mask: 255 . 255 . 255 . 0
Default Gateway: 192 . 168 . 1 . 2

Save Cancel

Enter Device Password

Password:

OK Cancel

Firmware updates for the MS-1000

STEP 1- Place the MS-1000 on a network that allows access to the public internet.

That is -- The MS-1000 must have HTTP access to www.tac-comm.com
It will automatically connect, it just needs to have access.

STEP 2 - Press and continue to hold the “Enter” button while plugging the power supply into the back of the MS-1000.

Continue to hold the “Enter” button while the flasher flashes and the beeper beeps and until you see the LCD display “Download Starting.” You can now release the “Enter” button.

The LCD will display the download status and will display “Download Complete” in just a few moments. It will then beep and flash and display “Initializing.”

The MS-1000 will start up in its normal mode.

The firmware update process is now complete.

